


SL7-Innovations Ltd

Relocatable, Zero Separation & 4hr Fire Protection

SL7™ - DG200/20 MINI VAULT

240/240/240 FRR Relocatable Vault

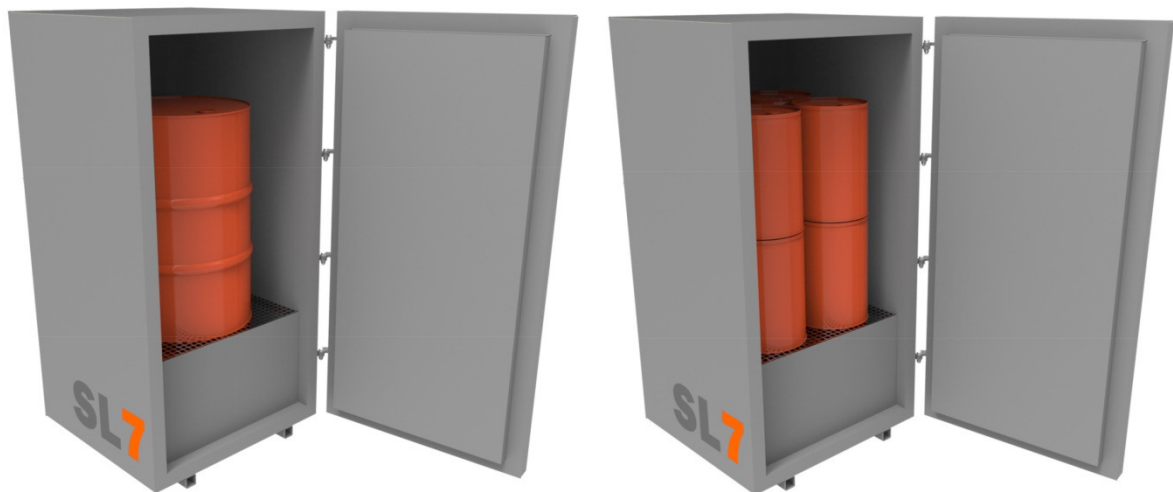

SL7™ - PRODUCT/TECHNICAL BULLETIN

"Relocatable, Zero Separation & 4hr Fire Protection"



DG200/20 MINI VAULT

Product/Technical Data Sheet



Product Description:

The DG200/20MHC Vault is a WorkSafe, 'Type D' approved storage vault meeting the requirements of 240/240/240 FRR and used primarily for the storage of hazardous substances in confined spaces where zero separation, relocatability and being certified compliance ready to site are major benefits.

Customer Benefits:

- SL7** 240/240/240 FRR compliant
- SL7** Can be used inside or outside – inside requires self-closing door assembly
- SL7** Ideal for small package stowage up to 200 litre drums and 20 litre pails
- SL7** Internally banded
- SL7** Self-closing door
- SL7** Three (3) removable shelves supplied
- SL7** Zero separation to buildings and boundaries – class dependent
- SL7** Ideal solution where building to boundary separation is an issue
- SL7** Arrives to site 'business ready', certified compliant for use
- SL7** Relocatable – can be dropped at site or relocated to a new site
- SL7** Saleable asset, not a 'sunk' capex cost - if it's surplus to requirements, sell it
- SL7** Removes or reduces building related compliance issues and associated costs to BWOFF

Testing Approvals:

This product has been tested and approved to AS1530.4 under the building code and the requirements of 240/240/240 FRR. It also meets the requirements of UL1709 and it's requisite 4 hour jet pool fire test.

Technical Data & Properties	
Colour – outside	Orange
Colour – inside	Orange
Paint	Two pack epoxy
Internal bund capacity	xxxxxx litres
Floor material	Fibreglass/Plastic grated
External length	900mm
External width – allowing for hinges	940mm
External height	1850mm
Internal length	719mm
Internal width	778mm
Internal height – floor to upper door access	1238mm
Shelving	3 x removable shelves
Approximate weight	900kg
Self-closing door	Gas strut inside
Insulation factor	120 degrees Celsius
Limiting Temperature	Xxxxxxxx

“Relocatable, Zero Separation & 4hr Fire Protection”



DG200/20 MINI VAULT

Product/Technical Data Sheet

Test Summary Report

SL7 products have been independently tested to, and exceed the requirements for 240/240/240 FRR against AS1530.4 as specified. Clicking the following .pdf for your copy of the test summary report;



SL7 Test Report
Summary.pdf

Compliance:

SL7 products are issued with a compliance plate affixed to the front/side giving details required by a registered test certifier to show that it meets all of the requirements of the regulations.

SL7 issues a PS1 & PS4 certifying compliance to AS1530.4.

Installation Requirements:


The vault needs to be placed on a concrete pad that is level ideally or at a minimum on a prepared level ground surface of compacted aggregates with the final preparation being an AP20 aggregate or similar.

Safety Instructions:

The doors should be secured at all times whether closed or opened to avoid any movement which could result in unintended harm.

Packing/Storage Examples:

These are examples of the stowage capacities of the DG200/20 Mini Vault, based on general accepted 200 litre drum and IBC dimensions;

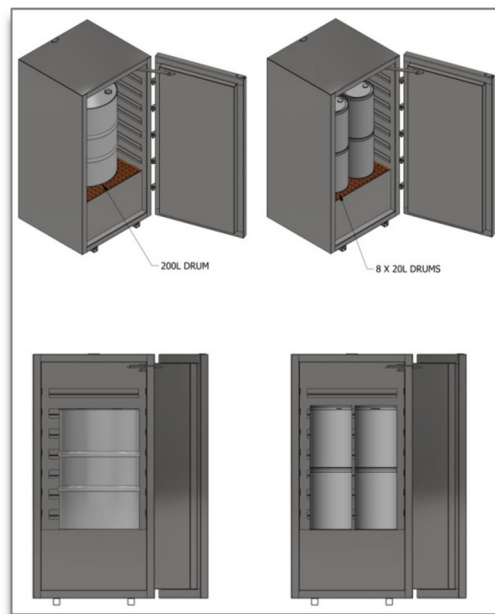

SL7-Vaults www.sl7.co.nz	
Serial Number	
Manufactured by	SL7 Innovations Limited
Fabrication No.	
FRR Rating	240/240/240
Secondary Containment Capacity	
Compliance Code	AS 1530.4
Registration Location - GPS Coords.	
Customer Ownership Name	

“Relocatable, Zero Separation & 4hr Fire Protection”




DG200/20 MINI VAULT

Product/Technical Data Sheet

Dimensional Specifications:

These dimensional specifications can vary slightly from actual based on manufacturing tolerance;

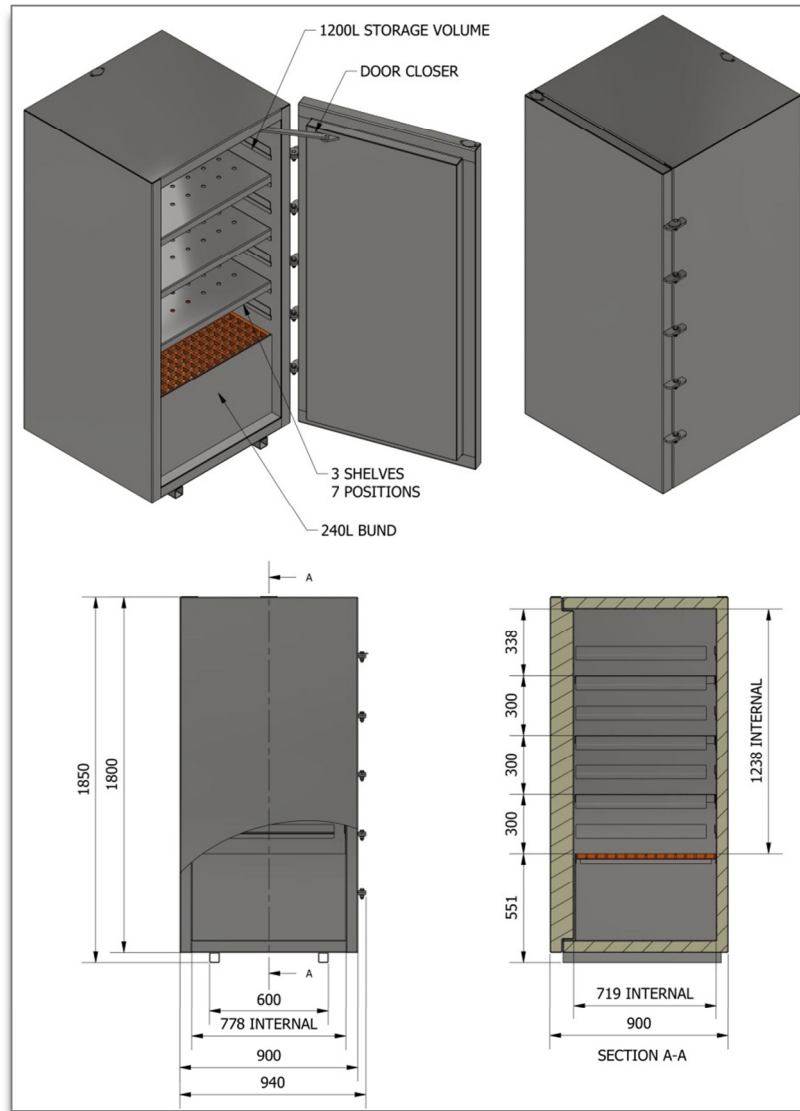

SL7 – New Zealand & Australia Enquiries:

SL7 Innovations Limited
66-68 Carmen Road, Hornby, Christchurch, New Zealand
Mobiles: +64 27 460 9254 or +64 27 460 9258
Emails: paul@SL7.co.nz or lionel@SL7.co.nz
Website: www.SL7.co.nz

“Relocatable, Zero Separation & 4hr Fire Protection”